


Drawings & Type Selection

Type	Dia.(mm)	Height(mm)	Power(w)	LES(mm)	Beam Angle	Cut-out(mm)
EPT-2511-12	85	70	12	11	12°	75
EPT-2511-24					24°	
EPT-2511-36					36°	

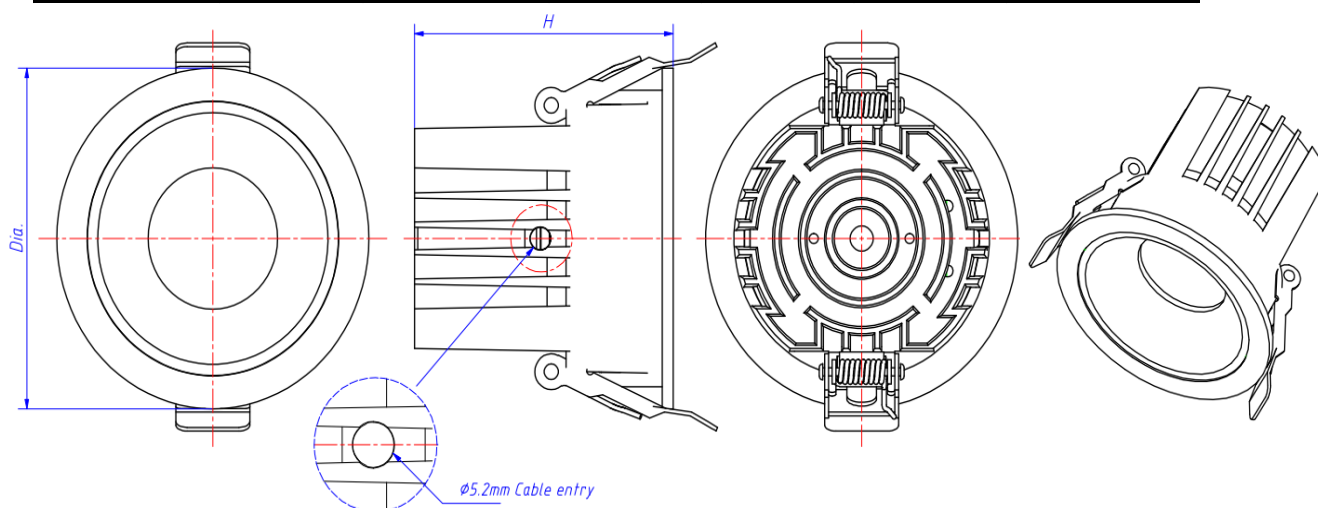

Components introduction

1. Remove the reflector, Install the COB



2. Fix the COB by the holder and screw



4. Mount the tapered ring



3. Insert the lens into the bracket button by rotating clockwise

