



Drawings & Type Selection

Type	Dia.(mm)	Height(mm)	Power(w)	LES(mm)	Beam Angle	Cut-out(mm)
Polar-3011-12	108	85	20	17	12°	95
Polar-3011-24					24°	
Polar-3011-36					36°	

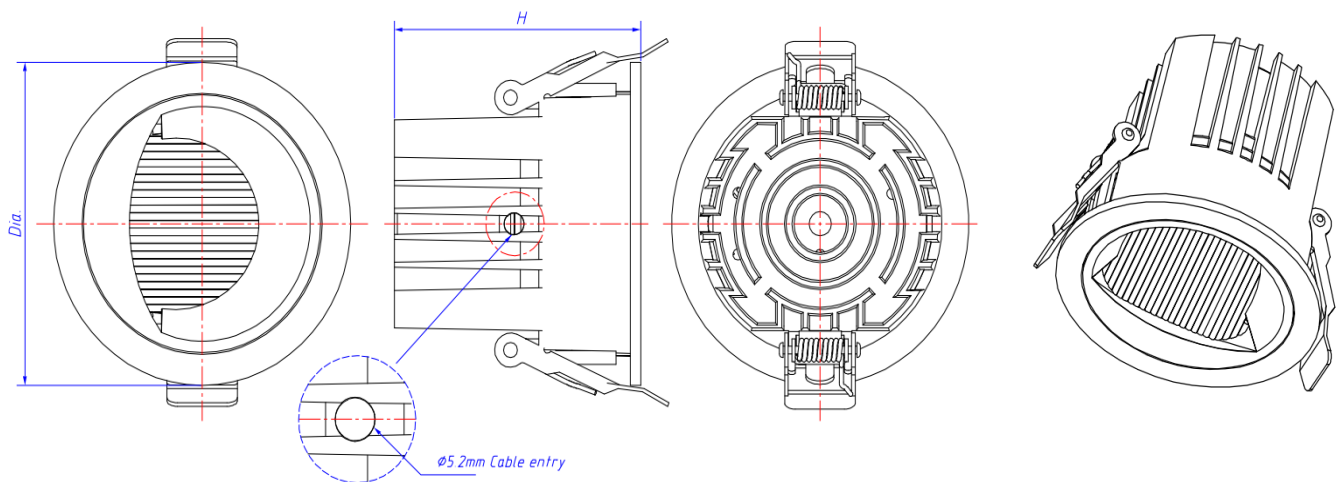


Components introduction


1. Remove the reflector, Install the COB

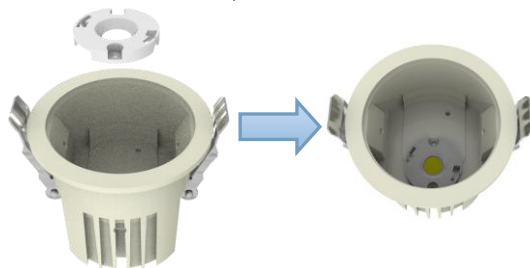

2-1. Insert the reflector kits into the two square holes in the heatsink

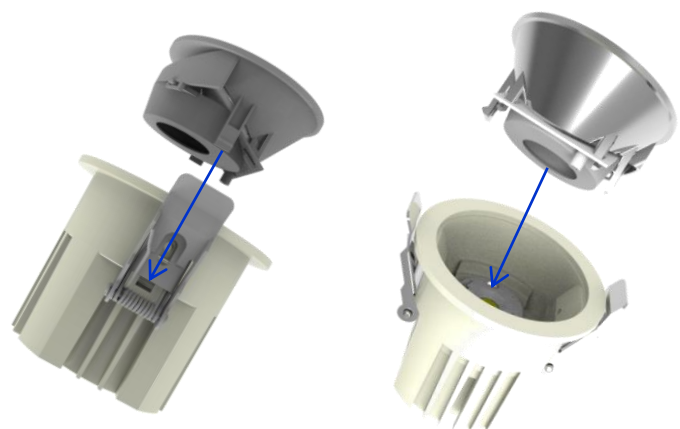

2. The reflector kits assembly

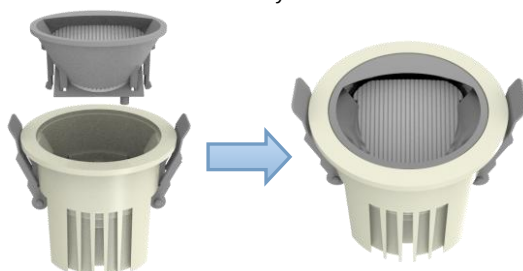

2-2. The reflector kits compatible with COB's LES